
Integral Tapered Roller Bearings (JKOS)

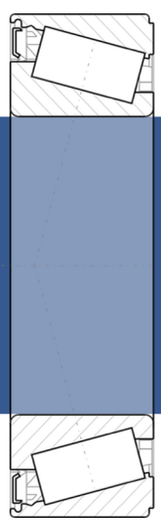

Version: 6/2021

Every care has been taken to ensure the correctness of the information contained in this document but no liability can be accepted for any errors or omissions.
Subject to change without prior notice.

GSWC Integral Tapered Roller Bearings (JKOS)

GSWC Integral Tapered Roller Bearings are sealed at one side, self-retaining and lubricated for life. They are mounted in pairs in order to obtain a bearing unit sealed at both sides. Due to the large spread, the bearing unit accommodates all load combinations from radial loads, axial loads and tilting moments.
Particularly economical solutions can be realized with Integral Tapered Roller Bearings for constructions exposed to very high loading and moderate speeds such as idlers, crane run wheels and sheaves.
The maximum operating temperature is 120°C.



Advantages:


- *Easy mounting:*
  Units consisting of cone, cup, roller set and seal are ready-to-mount (self-retaining).

- *No Adjustment necessary:*
  The correct radial clearance is automatically obtained by assembling the bearings in
  O-arranged pairs.

- *Maintenance-free:*
  Lubrication for life and a double-lip, low friction seal at both sides of the bearing pair.

HOISI PRECISION 凱獅精密
ISO 7312 9830

JKOS xxx

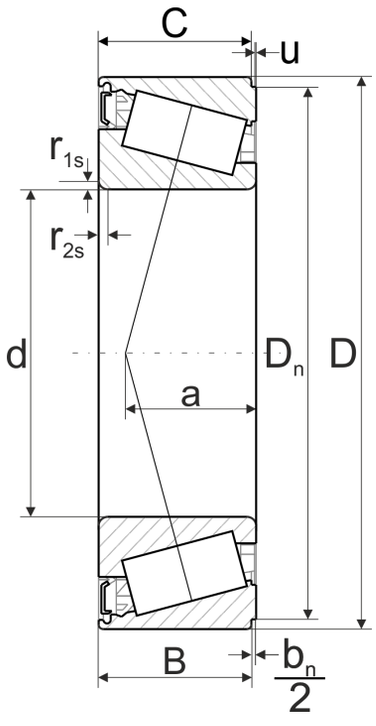


HOISI PRECISION 凱獅精密 180 7312 9830

Code	Dimensions									Load rating · Factor				
GSWC	d	D	B	C	D_n	$\frac{b_n}{2}$	a	u	r_{1s}, r_{2s}	C_{dyn}	e	Y	C_0	Y_0
							≈	+0,05	min.					
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kN]			[kN]	
JK0S 020	20	42	17	16,5	38,1	0,75	11,1	0,025	0,6	22,8	0,37	1,6	29	0,9
JK0S 025	25	47	17	16,5	43,1	0,75	12,4	0,015	0,6	25	0,42	1,4	34	0,8
JK0S 030	30	55	19	18,5	51,4	0,75	14,8	0,020	1,0	36	0,43	1,4	46,5	0,8
JK0S 035	35	62	20	19,5	58,4	0,75	16,2	0,020	1,0	36	0,44	1,4	50	0,7
JK0S 040	40	68	21	20,5	64,4	0,75	15,8	0,030	1,0	50	0,37	1,6	69,5	0,9
JK0S 045	45	75	22	21,5	70,7	1,00	17,2	0,020	1,0	55	0,38	1,6	81,5	0,9
JK0S 050	50	80	22	21,5	75,7	1,00	18,7	0,020	1,0	60	0,42	1,4	93	0,8
JK0S 060	60	95	26	25,0	89,8	1,25	23,1	0,030	1,5	76,5	0,43	1,4	122	0,8
JK0S 070	70	110	27	26,5	104,8	1,25	25,0	0,030	1,5	98	0,43	1,4	160	0,8
JK0S 080	80	125	30	29,5	119,8	1,25	28,0	0,030	1,5	129	0,42	1,4	212	0,8
JK0S 090	90	140	33,5	33,0	133,7	1,25	31,6	0,030	2,0	156	0,42	1,4	260	0,8
JK0S 100	100	150	33,5	33,0	143,6	1,25	34,4	0,030	2,0	166	0,46	1,3	290	0,7

Formulation of order:

Orders of DURABO integral tapered roller bearings should state the amount of single bearings required and not the number of pairs. Snap rings must be requested separately.

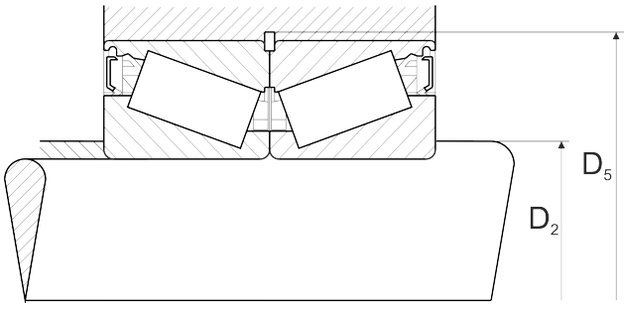

HOISI PRECISION 凱獅精密 180 7312 9830

Code	Additional information			Abutments				Weight
				Snap ring	Shaft	Nut	Tolerance	
GSWC	Z_{MAX} [kN]	F_{BR} [kN]	S_L [min^{-1}]		D_2 (min) [mm]	D_5 [mm]	[mm]	≈ [kg]
JK0S 020	4,5	13,3	4800	BR42	25	43,2	+0,16	0,100
JK0S 025	5,0	14,9	4000	BR47	30	48,2	+0,16	0,128
JK0S 030	7,2	15,7	3400	BR55	36	56,5	+0,19	0,180
JK0S 035	7,2	14,2	3000	BR62	41	63,5	+0,19	0,240
JK0S 040	10,0	12,9	2700	BR68	46	69,5	+0,19	0,290
JK0S 045	11,0	33,8	2400	BR75	51	76,8	+0,19	0,363
JK0S 050	12,0	31,4	2200	BR80	56	81,8	+0,22	0,403
JK0S 060	15,3	50,2	1800	BR95	67	97,0	+0,22	0,620
JK0S 070	19,6	49,0	1500	BR110	77	112,3	+0,22	0,900
JK0S 080	25,8	40,2	1300	BR125	87	127,3	+0,25	1,330
JK0S 090	31,2	40,2	1200	BR140	99	142,6	+0,25	1,900
JK0S 100	33,2	36,2	1100	BR150	109	152,6	+0,25	2,000

Z_{MAX} Maximum axial clamping force of bearing pair

F_{BR} Load carrying capacity of the snap ring connection

S_L Limiting speed (bearing pair, grease)